海信容声(广东)冷柜有限公司

卧式冷柜系列 使用说明书

 重要度
 B

 共 页 第 0 页

产品名称及型号 卧式冷柜系列

文 件 名 称 使用说明书

文 件 编 号 L08062271

零 件 材 料 70g双胶纸纸(144*210±2)

技术要求:

- 1、有害物质含量满足**冰箱**公司企业标准Q/HKB J16001 《零部件及原材料中有害物质含量的规定》的要求
- 2、黑白印刷 防火标签高度不低于15mm

描 校 描 写

| 旧底图总号 | 231952 | 26 E | BD/BC-4 | 120YP | /EHC(| (ER)-01 | MOR | R.GRC01-P | | | | | | | | |
|-------|--------|-----------|---------|-------|-------|---------|-----|-----------|----|-----|----|-----|---|-----|-----|------------|
| 底图总号 | 物料号 | - | | 首 | 次便 | き用型 | 틴두 | <u>1</u> | 原物 | 料号 | 原 | 图号 | | | | |
| | | | | | | | | | | 资 | 米 | 斗 来 | 源 | 编制 | 孙亚囡 | 2023-02-14 |
| 签字 | | | | | | | | | | | | | | 校对 | | |
| | | | | | | | | | | | | | | 标准化 | | |
| 日期 | | | | | | | | | | 提出部 | 祁门 | | | 审核 | | |
| | 标记 夕 | 心数 | 更 | 改 | 文 | 件 | 号 | 签字 | 日期 | 批准》 | 文号 | | | 批准 | | |



W70191EED W70297EED W70420EED

USER MANUAL

CHEST FREEZER

CONTENTS

| SAFETY AND WARNING INFORMATION ————— 1-7 | PARTS NAME AND FUNCTION 12 |
|---|----------------------------|
| HOW TO USE 8 | TEMPERATURE ADJUSTMENT AND |
| DEFROSTING / FIRST USE AND INSTALLATION — — — 9 | NOTICE ABOUT RECYCLING 16 |
| IN CASE THE FOLLOWING OCCURS10-11 | DECLARATION OF CONFORMITY |

SAFETY AND WARNING INFORMATION

For your safety and correct usage, before installing and first using the appliance, read this user manual carefully, including its hints and warnings. To avoid unnecessary mistakes and accidents, it is important to make sure that all people using the appliance are thoroughly familiar with its operation and safety features. Save these instructions and be sure that they remain with the appliance if it is moved or sold, so that anyone using it throughout its life will be properly informed on usage and safety notices. For the safety of life and property, keep the precautions of these user's instructions as the manufacturer is not responsible for damages caused by omission.

Safety for children and others who are vulnerable

According to EN standard This appliance can be used by children aged from 8 years and above and persons with reduced physical, sensory or mental capabilities or lack of experience and knowledge if they have been given supervision or instruction concerning use of the appliance in a safe way and understand the hazards involved. Children shall not play with the appliance. Cleaning and user maintenance shall not be made by children without supervision.

According to IEC standard
This appliance is not intended
for use by persons (including
children) with reduced
physical, sensory or mental
capabilities, or lack of
experience and knowledge,
unless they have been given
supervision or instruction

concerning use of the appliance by a person responsible for their safety.

Keep all packaging away from children as there is risk of suffocation

If you are discarding the appliance, pull the plug out of the socket, cut the connection cable (as close to the appliance as you can) and remove the door to prevent children playing from suffering an electric shock or from closing themselves inside.

If this appliance, featuring a magnetic door seals, is to replace an older appliance having a spring lock (latch) on the door or lid, be sure to make the spring lock unusable before you discard the old appliance. This will prevent it from becoming a death trap for a child

General safety

This appliance is intended to be used in households and similar applications such as -staff kitchen areas in shops, offices and other working environments;

- -farm houses and by clients in hotels, motels and other residential type environments;
- -bed and breakfast type environments;
- -catering and similar nonretail applications

WARNING — Do not store explosive substances such as aerosol cans with a flammable propellant in this appliance.

WARNING —If the supply cord is damaged, it must be replaced by the manufacturer, its service agent or similarly qualified persons in order to avoid a hazard.

 WARNING — Keep ventilation openings in the appliance enclosure or in any built-in structure clear of obstruction.

WARNING — Do not use mechanical devices or other means to accelerate the defrosting process, other than those recommended by the manufacturer.

WARNING — Do not damage the refrigerant circuit.

WARNING — Do not use

electrical appliances inside the food storage compartments of the appliance, unless they are of the type recommended by the manufacturer.

WARNING — The refrigerant and insulation are flammable. When disposing of the appliance, do so only at an authorized waste disposal center. Do not expose to flame.

WARNING —When positioning the appliance, ensure the supply cord is not trapped or damaged.

WARNING—Do not locate multiple portable socket-outlets or portable power supplies at the rear of the appliance.

WARNING —Damaged supply cord must be repalced by a special cord or assembly available from the manufacture or its service agent.

Replacing the LED light:

WARNING—If the product has LED light, the LED light must not be replaced by the user! If the LED light is damaged, contact the customer helpline for assistance.

Refrigerant

The refrigerant isobutene (R600a) is contained within the refrigerant circuit of the appliance, a natural gas with a high level of environmental compatibility, which is nevertheless flammable. During transportation and installation of the appliance, ensure that none of the components of the refrigerant circuit becomes damaged. The refrigerant (R600a) is flammable.

WARNING — Refrigerators contain refrigerant and gases in the insulation. Refrigerant and gases must be disposed of professionally as they may cause eye injuries or ignition. Ensure that tubing of the refrigerant circuit is not damage prior to proper disposal.

Warning: risk of fire/
flammable materials
If the refrigerant circuit is
damaged:

- -Avoid naked flames and sources of ignition.
- -Thoroughly ventilate the room in which the appliance is situated.

It is dangerous to alter the specifications or modify this product in any way.

Any damage to the cord may cause a short circuit, fire, and/or electric shock.

Electrical safety

- 1. The power cord must not be lengthened.
- 2. Make sure that the power plug is not crushed or damaged. A crushed or damaged power plug may overheat and cause a fire.
- 3. Make sure that you can access the main plug of the appliance.
- 4. Do not pull the main cable.
- 5. If the power plug socket is loose, do not insert the power plug. There is a risk of electric shock or fire.
- 6. You must not operate the appliance without the interior lighting lamp cover.
- 7. The fridge is only supplied with power supply of single phase alternating current of 220 ~ 240 V/50Hz. If fluctuation of voltage in the district of user is so large that the voltage exceeds the above scope, for safety sake, be sure to apply A.C.

Automatic voltage regulator of more than 350W to the fridge. The fridge must employ a special power socket instead of common one with other electric

appliances. Its plug must match the socket with ground wire.

Daily use

Do not store flammable gas or liquids in the appliance. There is a risk of an explosion.

Do not operate any electrical appliances in the appliance (e.g. electric ice cream makers, mixers etc.).

When unplugging always pull the plug from the mains socket, do not pull on the cable.

Do not place hot items near the plastic components of the fridge.

Do not place food products directly against the air outlet on the rear wall.

Store pre-packed frozen food in accordance with the frozen food manufacturer's instructions.

The manufactures storage recommendations should be

strictly adhered to. Refer to relevant instructions for storage.

Do not place carbonated or fizzy drinks in the freeze compartment as it creates pressure on the container, which may cause it to explode, resulting in damage to the appliance.

Frozen food can cause frost burns if consumed straight from the freezer compartment.

Opening the door for long periods can cause a significant increase of the temperature in the compartments of the appliance.

Clean regularly surfaces that can come in contact with food and accessible drainage systems.

Store raw meat and fish in suitable containers in the refrigerator, so that it is not in contact with or drip onto other food.

If the **refrigerating appliance** is left empty for long periods, switch off, defrost, clean, dry, and leave the door open to prevent mould developing within the appliance.

Do not place the appliance in direct sunlight.

 Keep burning candles, lamps and other items with naked flames away from the appliance so that do not set the appliance on fire.

The appliance is intended keeping for food and/or beverages in normal households as explained in this instruction booklet. appliance The is heavy. Care should be taken when moving it.

Do not remove or touch items from the freezer compartment if your hands are damp/wet, as this could cause skin abrasions or frost/freezer burns.

Never use the base, drawers, doors etc. to stand on or as supports.

Frozen food must not be refrozen once it has been thawed out.

Do not consume ice popsicles or ice cubes straight from the freezer as this can cause freezer burn to the mouth and lips.

To avoid items falling and causing injury or damage to the appliance, do not overload the door racks or put too much food in the crisper drawers.

In order to ensure better refrigeration effect, you need to adjust the machine to the Super Freeze mode 24h in advance when larger food is put into at one time.

2. Super Freeze mode will automatically return to the regular mode after 48h.

Caution! Care and cleaning

Before maintenance, switch off the appliance and disconnect the mains plug from the mains socket.

Do not clean the appliance with metal objects, steam cleaner, ethereal oils, organic solvents or abrasive cleansers.

Do not use sharp objects to remove frost from the appliance. Use a plastic scraper.

Installation important!

For electrical connection carefully, follow the instructions given in this manual.

Unpack the appliance and check if there are damages on it. Do not connect the appliance if it is damaged. Report possible damages immediately to the place you bought it. In this case retain packing.

It is advisable to wait at least four hours before connecting the appliance to allow the oil to flow back in the compressor.

Adequate air circulation should be allowed around the appliance reducing the risk of overheating. To achieve sufficient ventilation, follow the instructions relevant to installation.

Wherever possible the back of the product should not be close to a wall to avoid touching or catching warm parts (compressor, condenser) to prevent the risk of a fire, follow the instructions relevant to installation

The appliance must not be locate close to radiators or cookers.

Make sure that the mains plug is accessible after the installation of the appliance.

This refrigeration equipment is not intended to be used as a built-in equipment.

Service

Any electrical work required to do the servicing of the appliance should be carried out by qualified electrician or competent person. This product must be serviced by an authorized Serviced Center, and only genuine spare parts must be used.

Note: Children aged from 3 to 8 years are allowed to load and unload refrigerating appliances. (This clause applies only to the EU region.)

When refrigerating food, please be careful not to contact the surface of the inner box directly.

When frozen food, in order to prevent moisture loss, prevent the odor, should separate the different food sealed storage, and can only use non-toxic, tasteless, impermeable, waterproof sealing material.

Hot food should be cooled to room temperature first, then put into the freezer, otherwise it will affect the storage status of other foods and increase the power consumption.

Two-star frozen-food compartments are suitable for storing pre-frozen food, storing or making icecream and making ice cubes.

One-, two- and three-star compartments are not suitable for the freezing of fresh food.

| Order | Compartments TYPE | Target storage temp.[°C] | Appropriate food |
|-------|----------------------|--------------------------|--|
| 1 | Fridge | +2≤+6 | Eggs, cooked food, packaged food, fruits and vegetables, dairy products, cakes, drinks and other foods are not suitable for freezing. |
| 2 | (***)*-Freezer | ≤-18 | Seafood (fish, shrimp, shellfish), freshwater aquatic products and meatproducts (recommended for 3 months, the longer the storage time, the worse the taste and nutrition), suitable for frozen fresh food. |
| 3 | ***-Freezer | ≤-18 | Seafood (fish, shrimp, shellfish), freshwater aquatic products and meat products (recommended for 3 months, the longer the storage time, the worse the taste and nutrition), are not suitable for frozen fresh food. |
| 4 | **-Freezer | ≤-12 | Seafood (fish, shrimp, shellfish), freshwater aquatic products and meat products (recommended for 2 months, the longer the storage time, the worse the taste and nutrition), are not suitable for frozen fresh food. |
| 5 | *-Freezer | ≤-6 | Seafood (fish, shrimp, shellfish), freshwater aquatic products and meat products (recommended for 1 months, the longer the storage time, the worse the taste and nutrition), are not suitable for frozen fresh food. |



HOW TO USE

This appliance is intended to be used in household and similar applications such as

- staff kitchen areas in shops, offices and other working environments;
- farm houses and by clients in hotels, motels and other residential type environments;
- bed and breakfast type environments;
- -catering and similar non-retail applications

BEFORE USE

- Remove shipping package, tape, etc. and leave doors open for a while in order to ventilate the appliance.
- The unit is cleaned before shipment. However, it is recommended toclean the compartment interior once after delivery.
- Please insert power supply plug into the wall outlet, type ""grounded single-phase 220-240 V".
- Allow the unit to operate for about 1 hour to cool the compartment before placing items into the appliance.

WAIT 5 MINUTES OR MORE BEFORE RE-STARTING

- Restarting the unit immediately after it has been turned off may cause fuses to blow and activate the circuit-breaker, the compressor may become overloaded, and/or other damage may occur.
- The Super Freeze is used to perform pre-freezing and fast freezing in sequence of Freezer compartment. This function accelerates the freezing of fresh food and, at the same time, protects foodstuffs already stored from undesirablewarming.
- To freezefreshfoodactivatethe Super Freeze function at least 24 hours before placing the food to complete pre-freezing

EFFICIENT USE

Please follow the following instructions, in order to save energy consumption.

- To prevent cold air escaping from the chest freezer, open and close the door quickly and keep the door opened for as short time period as possible.
- Please install the unit in a well-ventilated location.
- Do not use the unit to store water or food that requires water as a storage medium. Never place fresh seafood containing water directly into the unit.

This refrigerating appliance is not intended to be used as a built-in appliance.

CHECKS

To ensure the safety, perform the following checks after cleaning the unit:

- Is the power cord plug firmly inserted into a dedicated wall outlet? Confirm that the plug is not abnormally hot.
- Check the power cord for cracks and damage. Should the slightest irregularity be observed, contact the dealer from whom you purchased this unit or our customer service department.

CLEANING AND DEFROSTING

To prevent any electrical shock hazards or injury by the rotating circulation fan, disconnect the power cord plug from the wall outlet before cleaning.

EXTERIOR

Wipe with a soft, dry cloth. If very soiled, wipe with a cloth that has been moistened with detergent. Then wipe with a cloth that has been dipped in clean water.

WARNING:

Do not splash water directly onto the chest freezer and do not wash with water. A short-circuit and/or electrical shock could be caused.

- Clean the cooler regularly to keep it clean at all times.
- Never use polishing powder, soap powder, benzine, oil or hot water as these will damage the painting and plastic components.
- Keep ventilation openings, in the appliance enclosure or in the built-in structure, clear of obstruction.
- Open the door and wipe clean with a dry cloth.



DEFROSTING/FIRST USE AND INSTALLATION

You should defrost the freezer compartment two or three times a year when the ice is about 4 mm thick. To defrost, follow these steps:

- Set the thermostat to "Colder" at least 12 hours before defrosting.
- After this period has elapsed, switch off the freezer compartment by removing the plug from the main power supply.
- Remove all food from the freezer and wrap them in paper and store them in a cold place and leave the door open.
- When the defrosting is finished, the compartment must be cleaned and wiped dry.
- Switch the appliance back on using the thermostat set to "Colder"and, wait at least one hour before replacing the foodstuffs.
- After a few hours the thermostat can be set back to the original position.

WARNING:

Do not use mechanicals devices or other artificial means to accelerate the defrosting process, other than those recommended by the manufacturer.

WARNING:

Do not use electricals appliance inside the food storage compartment of the appliances, unless they are of the type recommended by the manufacturer.

Cleaning before use


Before using the appliance for the first time, wash the interior and all internal accessories with lukewarm water and some neutral soap so as to remove the typical smell of a brand new product, then dry thoroughly.

Important! It is necessary to have good ventilation around the freezer to allow for the dissipation of heat, high efficiency, and low power consumption. For this reason, sufficiently cleared space should be available around the freezer. It is advisable for there to be 75mm separating the back of the freezer to the wall and at least 100mm of space on its two sides, a height of over 100mm from its top.

Introducing Winter Guard



This product features Hisense Winter Guard technology. It allows the product to operate in environments such as garages, sheds or outbuildings where temperatures can drop as low as-15 $^{\circ}$ C



Note:

This appliance performs well within the climate class from SN to T showed in the table below. It may not work properly if being left at a temperature above or below the indicated range for a long period.

| Climate class | Ambient temperature |
|---------------|---------------------|
| SN | +10°C to +32°C |
| N | +16°C to +32°C |
| ST | +16°C to +38°C |
| Т | +16°C to +43°C |

Appliances must not be exposed to rain. Sufficient air must be allowed to circulate in the lower rear section of the appliance, as poor air circulation can affect perfor-mance. Built-in appliances should be positioned away from heat sources such as heaters and direct sunlight.

Leveling

The appliance should be level in order to eliminate vibration.

To make the appliance level, it should be upright and both adjusters should be in stable contact with the floor.

You can also adjust the level by unscrewing the appropriate level adjustment in the front (use your fingers or a suitable spanner).

IN CASE THE FOLLOWING OCCURS



Warning! Before trouble-shooting, disconnect the power supply. Only a qualified electrician or

other person must carry out the trouble-shooting that is not in the manual.

Important!

Repairs to the appliance may only be performed by competent service engineers. Improper repairs can give rise to significant hazards for the user. If your appliance needs repairing, please contact your specialist dealer or your local Customer Service Center.

| Problem | Solution | | | | | | |
|------------------------------------|---|--|--|--|--|--|--|
| POWER FAILURE | Keep the opening and closing of the door for a minimum time to prevent cold air from escaping. | | | | | | |
| | Avoid placing new items in the cooler as this will raise the temperature inside the compartment. | | | | | | |
| | In case of a long power suspension, place dry ice in the freezer | | | | | | |
| POWER CORD PROBLEMS | If the supply cord is damaged, it must be replace by a special cord or assembly available from the manufacturer or the service agent. | | | | | | |
| | The showcase must be positioned so that the plug is accessible to the wall outlet. | | | | | | |
| WHEN NOT USED FOR A LONG PERIOD | Remove all items from the compartment and disconnect the power cord plug from the wall outlet. | | | | | | |
| | Clean the compartment interior and wipe away all water. | | | | | | |
| | To prevent mold formation and foul odors, leave the door open to dry the compartment completely. | | | | | | |
| TRANSPORTATION | Disconnect the power cord plug from the wall outlet. | | | | | | |
| | When moving the appliance, make sure that the feet do not damage the power cord. | | | | | | |
| | Do not let the feet hit against floor steps, thresholds, etc. | | | | | | |
| TEMPORATY STORAGE | Put piece of wood or other similar item between, the door and main unit to prevent complete closing of the door. | | | | | | |
| | Be sure not to store the unused chest freezer in a location where children play. | | | | | | |
| | Should a child enter the compartment and the door is closed, the child may not be able to open the door from the inside. | | | | | | |
| | | | | | | | |


11
Please check the following if you encounter problems with the unit. If the problem continues after taking the proper remedial actions, disconnect the power cord plug from the wall outlet.

Transfer the items stored in the cooler to a box or other container. Then contact the dealer from whom you purchased this unit ,and be ready to provide information as listed in the "REQUIRED INFORMATION" below.

To prevent any electrical shock hazards, do not disconnect the power cord plug from the wall outlet with wet hands. No refrigeration at all Is the power supply interrupted? Is the power cord plug disconnected from the wall outlet? Are the shop's power fuses blown and/or the circuit breaker activated? Is the temperature control turned to OFF? Is the place of installation ventilated? Inadequate refrigeration Is the freezer exposed to direct sunlight, placed near a heater or stove? Are the lids opened and closed frequently? Is the temperature control dial in the direction of Colder. If it is too cold, turn dial in direction of Cold. Is a lot of frost forming in the freezer compartment? Excessive noise Is the floor underneath the freezer sturdy enough? Is the unit shaking and/or rattling? Is the rear panel of the unit in contact with a wall, etc.? Is there a container or something behind the freezer? The compressor will generate a rather loud sound for a while after operation is started. The noise will cease together with refrigeration. Condensation may condense on the exterior of the unit and the door during hot and Condensation humid days or depending on the place of installation. This occurs when the humidity is cooler exterior high and water particles in the cold surfaces. This is normal. Wipe away condensation with a dry cloth. The circumference of Especially in summer or in the period of starting running, the circumference of the chest chest freezer feels hot freezer feels hot because the Chest freezer inside has a pipe for radiating and preventing condensation. The heat does not affect inside goods. Pipe

PARTS NAME AND FUNCTION

Model NO: W70191EED, W70297EED, W70420EED

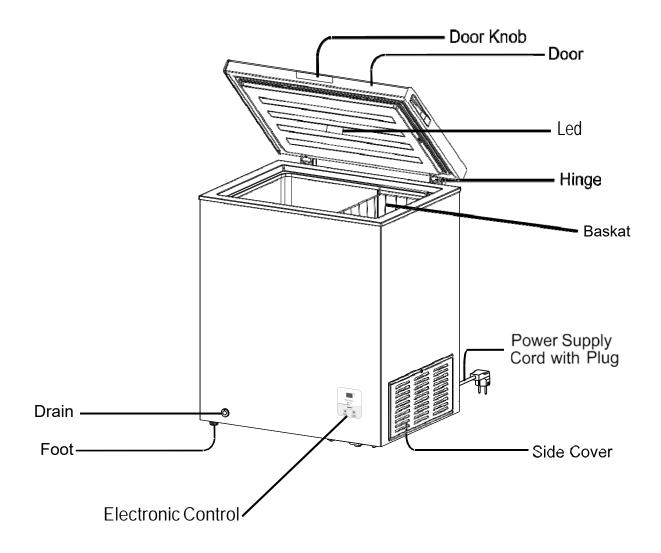

Note!

• To get the best energy efficiency of this product, please place all shelves, drawers on their original position as the illustration above.


Never touch the interior of the freezer chamber or frozen foods in the compartment with wet hands as this could result in frostbite.

The above image is for reference only; configuration is subject to the actual product.

TEMPERATURE ADJUSTMENT AND DISCRIPTION OF APPLIANCE

Control panel

It is used to control operation mode of the refrigerator and is located in the front of the refrigerator.

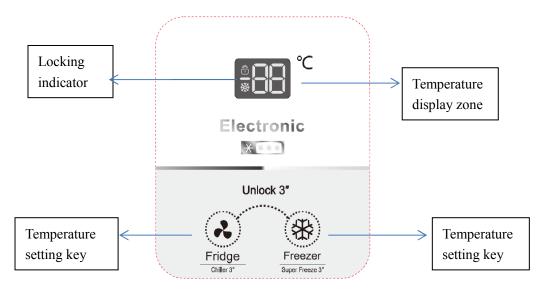

NOTE: High temperature setting will accelerate food waste.

Note: This figure is only a schematic diagram, so please refer to the physical object for details.

- 2. Hint: Since the displayed setting temperature is not the actual temperature but the target temperature, the temperature inside the refrigerator will vary depending on the stored foods.
- 3. Unlocking

When key locking icon of the refrigerator turns on, it means that keys of the refrigerator are locked, and adjustment of temperature and modes is unavailable. If the refrigerating and freezing key is pressed and held for about 3s at this moment, the locking indicator will turn off, keys will be

unlocked, and the temperature and modes can be adjusted.

If no key is pressed within approximately 20s after 5 minutes of power on, the keys will be locked automatically. If no key is pressed within approximately 60s, the indicator will turn off.

When any key is touched slightly at this time, the indicator will turn on again. The keys are not locked and the indicator turns on within 5 minutes after power on.

4. Mode switching and temperature adjustment

NOTE: The setting range of temperature is 5° C to -18°C, lowest -24°C (only comes with the super freeze function)

Mode switching:

- 1) After the refrigerating key is pressed and held for about 3s in interchangeable temperature mode when the keys are unlocked, the refrigerating mode will be enabled; and, refrigerating mode will be enabled when the refrigerating key is pressed briefly in freezing mode;
- 2) After the refrigerating key is pressed and held for about 3s in a mode other than interchangeable temperature mode when the keys are unlocked, the interchangeable temperature mode will be enabled; and, after the refrigerating key is pressed and held for

about 3s in interchangeable temperature mode, the interchangeable temperature mode will be exited, and the refrigerating or freezing mode will be enabled;

3) After the freezing key is pressed briefly in a mode other than freezing mode when the keys are unlocked, the freezing mode will be enabled;

Temperature adjustment

1) Refrigerating temperature adjustment:

When the keys are unlocked, each time the refrigerating key is pressed in refrigerating mode, the temperature display zone will change from current setting temperature in the following order:

"
$$5 \rightarrow 4 \rightarrow 3 \rightarrow 2 \rightarrow 8 \rightarrow 7 \rightarrow 6 \rightarrow 5$$
".

2) Interchangeable temperature adjustment:

When the keys are unlocked, each time the refrigerating key is pressed in interchangeable 15

temperature mode, the temperature display zone will change from current setting temperature in the following order:

$$0 \rightarrow -1 \rightarrow -2 \rightarrow \cdots \rightarrow -12 \rightarrow -13 \rightarrow 1 \rightarrow 0$$
.

3) Freezing temperature adjustment:

When the keys are unlocked, each time the freezing key is pressed in freezing mode, the temperature display zone will change from current setting temperature in the following order: $"-14 \rightarrow -15 \rightarrow -16 \rightarrow \cdots \rightarrow -22 \rightarrow -23 \rightarrow -24 \rightarrow -14"$.

About 2s after the temperature setting is completed, the setting temperature flashes 5 times and the setting takes effect.

4. Quick-freezing mode switching

After the freezing key is pressed and held for about 3s in a mode other than quick-freezing mode when the keys are unlocked, the quick-freezing mode will be enabled, "-25" will be displayed in temperature display zone and the quick-freezing icon turns on. If no key is pressed then, the "-25" in temperature display zone will flash 5 times and setting of quick-freezing mode takes effect; the temperature cannot be adjusted in quick-freezing mode. When the refrigerating or freezing key is pressed briefly, the quick-freezing icon will flash 5 times to remind

the user that the refrigerator is currently in quick-freezing mode;

After the freezing key is pressed and held for about 3s in quick-freezing mode when the keys are unlocked, the quick-freezing mode will be exited, and the mode and setting temperature before entering into quick-freezing mode will be resumed. After a period of continuous forced freezing in quick-freezing mode, the mode will be exited

automatically and the original setting temperature will be followed during operation.

Notes: The quick-freezing mode allows for rapid refrigeration, but also increases power consumption.

The refrigerator can automatically remember the state before power off in case of any power failure, and run according to the state before power off after resumption of power, in which the quick-freezing mode will not be remembered.

5. Alarm and handling

When "E1" is displayed in the temperature display zone, it means that temperature sensing head of the refrigerator is out of order. Although the computer board will automatically control the operation, you shall contact the maintenance point for repair in time.

DISCRIPTION OF APPLIANCE

Plug replacement (UK & Ireland only)

InstallationAny electrical work that is required to install this appliance MUST be carried out by a qualified electricia

Warning: THIS APPLIANCE MUST BE GROUNDED

Before making any electrical connections, ensure the following:

Electrical connection

Electrical safety is only guaranteed when the grounding system of your house is in accordance with the related local regulations.

Do not damage the refrigerant circuit.

Do not bend, stretch or pull the supply cable to avoid electric shock.

Ensure the power socket is suitable for the maximum power of the machine (fuses in the power circuit must be 13 amp).

Do not use electrical appliances inside the food storage compartments of the appliance, unless they are of the type recommended by the manufacturer.

The supply voltage should be the same as that indicated in the technical specifications and the appliance rating plate.

The appliance should be grounded and in compliance with the applicable laws.

When installed, the power socket must be within easy reach.

If the socket outlets in your home are not suitable for the plug supplied with this unit check with a qualified electrician for replacement.

The appliance must be connected to a 220-240 volt 50Hz AC supply by means of a three-pin socket, suitably grounded and protected by a 13 amp fuse.

Should the fuse need to be replaced, a 13 amp fuse approved to BS1363/A standards must be used.

The plug contains a removable fuse cover that must be refitted when the fuse is replaced. If the fuse cover is lost or damaged, the plug must not be used until a replacement cover has been fitted or the plug is replaced.

A damaged plug should be cut off as close to the plug body as possible, the fuse should be removed and the plug disposed of safely.

The use of adapters, multiple connectors or extension cables is not recommended,

Should you need to replace the plug, the wires in the power cable are coloured in the following way:

Blue - Neutral 'N'

Brown - Live 'L'

Green & Yellow - Earth 'E'


As the colours of the wires in the power cable may not correspond with the coloured markings identifying the terminals in your plug, and proceed as follows:

The green & yellow wire must be connected to the terminal in the plug that is marked with the letter E or by the earth symbol.

The blue wire must be connected to the terminal that is marked with the letter'N'.

The brown wire must be connected to the terminal that is marked with the letter 'L'.

If power supply cord is damaged, it must replaced by the manufacturer or its service agent or a similar qualified person in order to avoid a hazard.



The specifications may change, please refer to the circuit name plate on the back of your chest.

NOTICE ABOUT RECYCLING



Your product is designed and manufactured with high quality materials and components which can be recycled and reused.

This symbol means that electrical and electronic equipment, at their end-of-life,

should be disposed of separately from your household waste. Please dispose of this equipment at your local community waste collection/recycling centre.

In the European Union there are separate collection systems for used electrical and electronic products.

Please help us to conserve the environment we live in!

DECLARATION OF CONFORMITY

Herewith, we state that this product complies with the requirements of below directives:

EMC-Directive: 14 / 30 / EU

Low Voltage Directive: 14/35 / EU

ErP Directive 09 / 125 / EC

CE Marking: 93 / 68 / EEC

RoHS Directive: 11 / 65 / EU & Delegated Directive (EU) 15 / 863

The detailed declaration of conformity can be found at

www.morris.gr

